

Experimental Investigation of Heat Transfer Characteristics of Calcined Petroleum Coke Fin-and-Tube Waste Heat Exchanger

Bin Zheng¹, Yongqi Liu^{*1}, Ruixiang Liu¹, Zuofeng Wang², Zuoren Wang², Rujun Yu³ and Xiaoni Qi¹

¹School of Transportation and Vehicle Engineering, Shandong University of Technology, Zibo 255049, China

²Weifang Lianxing Carbon Co., Ltd., Weifang 262737, China

³School of Chemical Engineering, Shandong University of Technology, Zibo 255049, China

Abstract: The experimental system of waste heat utilization exchanger, installed in the tank calcined furnace, was built. The heat transfer coefficient of heat exchanger, temperature distribution of calcined petroleum coke and utilization ratio of waste heat were systematically studied. The results showed that with the increase of calcined petroleum coke velocity, the heat transfer coefficient of heat exchanger increases. The utilization ratio of waste heat increases first and then decreases. With the increase of water velocity, the heat transfer coefficient of heat exchanger increases. Compared with light-and-tube heat exchanger, the heat transfer performances of fin-and-tube heat exchanger increase. The average steam producing rate and the average utilization ratio of waste heat increase. The average temperature of calcined petroleum coke in heat exchanger outlet decreases. The uniformity degree of temperature in heat exchanger outlet increases.

Keywords: Calcined petroleum coke, fin-and-tube, heat transfer characteristic, steam producing rate, utilization ratio of waste heat, waste heat exchanger.

1. INTRODUCTION

Petroleum coke is calcined to remove the fugitive constituent through high temperature, which becomes calcined petroleum coke after complete carbonized. The calcined petroleum coke is one of the important basic raw materials. It is widely used in producing anode of aluminum electrolytic, graphite electrode, recarburizer, industrial silicon and other carbon products.

The China's production capacity of calcined petroleum coke is largest in the world, above 70% of which is produced in tank calcined furnaces [1-5]. The temperature of calcined petroleum coke discharged from tank calcined furnaces is up to 1000 °C, and the waste heat of it has high potential to be utilized. The calcined petroleum coke would be cooled in waste heat exchanger after discharged from tank calcined furnaces. The oxidation combustion reaction could be prevented.

Heat transfer of the solid material had been studied in some fields. Barati [6] introduced some waste heat recovery methods of the high temperature steel slag. The waste heat of the high temperature steel slag is utilized by rotary cylinder atomizing method and air nozzle method [7-9]. Generation of fuels based on the utilization of the slag thermal energy in endothermic reactions has been recently studied. As a heat carrier and storage medium, the use of hot slag has been proposed [10, 11].

Investigation related to the utilization technology of calcined petroleum coke waste heat, however, has been very limited. In this paper, heat transfer characteristics of calcined petroleum coke fin-and-tube waste heat exchanger were studied by the experimental system of waste heat utilization exchanger.

2. EXPERIMENTS

The experimental system of waste heat utilization exchanger was built in Weifang Lianxing Carbon Co., Ltd. The heat transfer experiments were carried out by the experimental system (Fig. 1). The experimental system is composed of fin-and-tube waste heat exchanger, calcined petroleum coke supply system, water circulation system and measurement system.

Fin-and-tube waste heat exchanger: Fin-and-tube waste exchanger includes outer heat exchanger and inner heat exchanger. The axial fin is equipped with heat exchanger tube. Its structure is shown in Fig. (2).

Calcined petroleum coke supply system: The experimental system is installed in the tank calcined furnace. The high temperature calcined petroleum coke is directly supplied from tank calcined furnace.

Water circulation system: This system is composed of cooling pond, pumps, valves, sight glass, drum and so on. There is a FLUXUS F601 ultrasonic flowmeter in the heat exchanger inlet, which is used for measuring the water flow. Its measuring accuracy is $\pm 0.5\%$. Its repeatability is 0.15%. Its measuring velocity range is from 0.01 m/s to 25 m/s. There is a WSM-D two-phase flowmeter in the heat

*Address correspondence to this author at the School of Transportation and Vehicle Engineering, Shandong University of Technology, Zibo 255049, China; Tel: +86-533-2782616; Fax: +86-533-2782616; E-mail: liuyq65@163.com

Fig. (5). When the velocity of calcined petroleum coke is small, the utilization ratio of waste heat increases gradually with the increase of calcined petroleum coke velocity. The reason is that with the increase of calcined petroleum coke velocity, the heat transfer coefficient of heat exchanger increases. The heat transfer quantity and utilization ratio of waste heat increase. When the velocity increases to a definite value, the utilization ratio of waste heat decreases gradually with the increase of calcined petroleum coke velocity. The reason is that with the increase of calcined petroleum coke velocity, the heat transfer coefficient of heat exchanger increases continuously, However; heat transfer time decreases. There is no guarantee that heat transfer processes; However, the utilization ratio of waste heat decreases.

Figs. (7, 9). The water pressure is 0.4 MPa. The inlet water temperature is 40°C. With the increase of water velocity, the heat transfer coefficient of inner heat exchanger and outer heat exchanger increases gradually. The outlet water temperature decreases gradually. When the water velocity of waste heat exchanger tube is small, the outlet water phase is superheated steam. The outlet water temperature and dryness fraction are high. the thermal resistance in heat exchange tube is big. The heat transfer coefficient is small. With the increase of water velocity, the outlet water temperature and dryness fraction decrease. The outlet water phase is wet-steam. The thermal resistance in heat exchange tube decreases. The heat transfer coefficient increases. When the water velocity increases to a definite value, the outlet water phase is supercooled water. The outlet water temperature decreases and heat transfer coefficient increases.

Fig. (5). Variations of waste heat utilization ratio with different calcined petroleum coke velocity.

3.2. Effects of Water Velocity in Waste Heat Exchanger Tube

The heat transfer coefficients with different water velocity in waste heat exchanger tube are shown in Fig. (6)

Fig. (7). Variations of the outlet water temperature with different water velocity in inner waste heat exchanger tube.

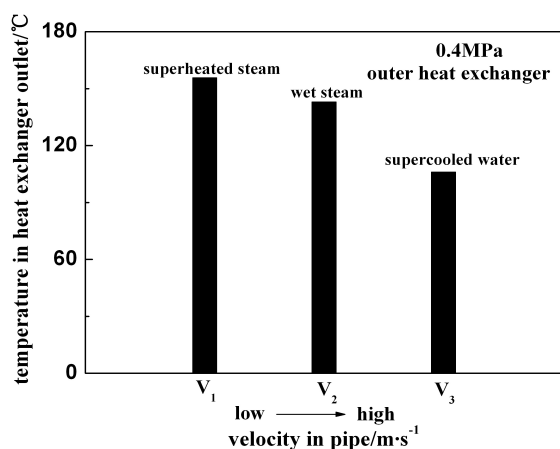
Fig. (6). Variations of heat transfer coefficient with different water velocity in inner waste heat exchanger tube.

and Fig. (8). The outlet water temperatures with different water velocity in waste heat exchanger tube are shown in

Fig. (8). Variations of heat transfer coefficient with different water velocity in outer waste heat exchanger tube.

Table 1. Performance parameters contrast of fin-and-tube waste heat exchanger and light-and-tube waste heat exchanger.

Heat Exchanger Tube Type	Fin-and-Tube	Light-and-Tube
The average temperature of calcined petroleum coke in heat exchanger outlet	181 °C	195 °C
The nonuniformity coefficient of temperature in heat exchanger outlet	0.0757	0.1123
The average steam producing rate	75.6 kg/h	68.4 kg/h
The average utilization ratio of waste heat	71.5 %	78.9 %

**Fig. (9).** Variations of the outlet water temperature with different water velocity in outer waste heat exchanger tube.

3.3. Effects of Fin-and-Tube

Performance parameters contrast of fin-and-tube waste heat exchanger and light-and-tube waste heat exchanger are shown in Table 1. Compared with light-and-tube heat exchanger, the heat transfer performances of fin-and-tube heat exchanger increase. The average temperature of calcined petroleum coke in heat exchanger outlet decreases. The average temperature value reduce 14 °C. The uniformity degree of temperature in heat exchanger outlet increases. The nonuniformity coefficient of temperature reduces 32.6 %. The average steam producing rate rise 7.2 kg/h. The average utilization ratio of waste heat rises 7.4 %. The reason is that the heat conductivity coefficient of calcined petroleum coke is small. The thermal resistance of tube is big. When the axial fin is equipped with heat exchanger tube, the heat transfer area increases obviously. The heat transfer process is strengthened.

CONCLUSION

The waste heat of calcined petroleum coke is utilized by fin-and-tube waste heat exchanger. With the increase of calcined petroleum coke velocity, the heat transfer coefficient of inner heat exchanger and outer heat exchanger increases gradually. The utilization ratio of waste heat increases first and then decreases, so this has an optimum calcined petroleum coke velocity. With the increase of water

velocity, the heat transfer coefficient of inner heat exchanger and outer heat exchanger increases gradually. The outlet water temperature decreases gradually. Compared with the type of heat exchanger tube is light-and-tube, the heat transfer performances of fin-and-tube heat exchanger increase. The average steam producing rate rise 7.2 kg/h. The average utilization ratio of waste heat rises 7.4%. The average temperature of calcined petroleum coke in heat exchanger outlet decreases. The uniformity degree of temperature in heat exchanger outlet increases.

CONFLICT OF INTEREST

The authors confirm that this article content has no conflict of interest.

ACKNOWLEDGEMENTS

This work was financially supported by Shandong Provincial Natural Science Foundation, China (No. ZR2013EEQ005), Shandong Provincial Science and Technology Development Program, China (No. 2013GGX10404) and Weifang Science and Technology Development Program (No.20121148).

REFERENCES

- [1] Wang, P.; Luo, Y. Developing characteristics and technical advancement of carbon anode industry in China in recent years. *Carb. Tech.*, **2011**, *30*(2), 40-46.
- [2] Zhu, S.; Xu, J.; Luo, Y. Discussion and practices of petroleum coke high temperature calcination technology. *Light Metals*, **2010**, (3), 30-34.
- [3] Vendette, H.; Cloutier, B. *Anode Paste Plants: Innovative Solution for Optimum Emission Performances*. In: Proceedings of the 2010 TMS Annual Meeting & Exhibition; 2010; Johnson, J.A., Ed.; Seattle: WA, **2010**, pp. 993-996.
- [4] Sun, Y. Analysis on the energy conservation and emission reduction technology in Chinese carbon industry. *Carb. Tech.*, **2012**, *31*(11), 1-5.
- [5] Zhang, Y. The implement of the technology of heating htm oil with margin thermal fume carbon calcination shop. *Sichuan Metal.*, **2012**, *11*, 38-41.
- [6] Barati, M.; Esfahani, S.; Utigard, T.A. Energy recovery from high temperature slags. *Energy*, **2011**, *36*(9), 5440-5449.
- [7] Rodd, L.; Koehler, T.; Walker, C. *Economics of Slag Heat Recovery from Ferronickel Slags: Sustainability for Profit*. In: Proceedings of the 49th Annual Conference of Metallurgists; 2010; Richards, G., Ed.; Vancouver, **2010**, pp. 3-17.
- [8] Kashiwaya, Y.; In-Nami, Y.; Akiyama, T. Development of a rotary cylinder atomizing method of slag for the production of amorphous slag particles. *ISI J. Int.*, **2010**, *50*(9), 1245-1251.
- [9] Kashiwaya, Y.; In-Nami, Y.; Akiyama, T. Mechanism of the formation of slag particles by the rotary cylinder atomization. *ISI J. Int.*, **2010**, *50*(9), 1252-1258.

[10] Nomura, T.; Okinaka, N.; Akiyama, T. Technology of latent heat storage for high temperature application: a review. *ISI J. Int.*, **2010**, *50(9)*, 1229-1239.

[11] Kashiwaya, Y.; Akiyama, T.; In-Nami, Y. Latent heat of amorphous slags and their utilization as a high temperature PCM. *ISI J. Int.*, **2010**, *50(9)*, 1259-1264.

Received: November 23, 2013

Revised: March 20, 2014

Accepted: March 20, 2014

© Zheng *et al.*; Licensee *Bentham Open*.

This is an open access article licensed under the terms of the Creative Commons Attribution Non-Commercial License (<http://creativecommons.org/licenses/by-nc/3.0/>) which permits unrestricted, non-commercial use, distribution and reproduction in any medium, provided the work is properly cited.