

Finite Element Analysis of a Cofferdam with Bucket Foundations at Zhuanghai Artificial Island

Jianhong Zhang* and Xingxing Zhang

State Key Laboratory of Hydrosience and Engineering, Tsinghua University Beijing, 100084, China

Abstract: This paper presents a finite element study of the stability and deformation of a cofferdam incorporating bucket foundations in soft clays at Zhuanghai Artificial Island. The development of excess pore pressures in the clays has been investigated in terms of the progress of construction, geometry of structures and hence the load resulted. The effect of pre-fabricated drains on the behavior of the soil-structure system has been highlighted.

Keywords: Finite element method, bucket foundation, prefabricated drains.

INTRODUCTION

About 3.0×10^8 t petroleum geological reserves have been recently detected in Bohai Bay, thus several oil fields are planned to be built. However, the safety of offshore structures is threatened by severe marine environment, such as energetic wave regime, strong influence of tides and currents and poor soil conditions. The stability of soil-structure systems on soft clays is one of the most concerned problems.

Suction bucket foundations have been applied increasingly often in offshore engineering [1]. The convenience of installation and repeat use is one of the most outstanding advantages. Physical and numerical simulations are the two main methods in safety evaluations of the structures. Great efforts have been taken in both areas on bearing capacity, deformation, dynamic behaviors, etc, of bucket foundations. For example, Dyvik *et al.* [2, 3] performed a series of 1 g model tests on bucket foundations. Allard *et al.* [4] later reported their centrifuge model tests of bucket foundations on very dense sand for gravity platform. El-Ghbarbawy and Olson [5] investigated the cyclic pullout capacity of suction caisson foundations. Zhang *et al.* [6] conducted a series centrifuge model tests to study the dynamic behaviors of suction buckets under cyclic lateral loadings. Finite element analysis has been used quite often in numerical evaluation of marine structures in soft clay. Wu *et al.* [7] performed finite element analyses to evaluate the ultimate bearing capacity of bucket foundations in undrained soft clay under vertical force, horizontal force and moment. Effects of aspect ratio of bucket foundation and shear strength of soft soil were studied. Zhang *et al.* [8, 9] performed finite element analysis to study the stability of jetties and breakwaters at Huanghua Port.

Zhuanghai artificial island is located at a shallow water area of Bohai Sea, 6 km to the east of Huanghua city. It has two main functions: first, accommodating oil well fields with annual production of about 1.93×10^5 t, then, being a base for

shipping, maritime emergency response and debarkation. Fig. (1) shows the the cofferdam of Zhuanghai artificial island. The cofferdam consists of a retaining wall of a large diameter reinforced concrete cylinder rested on two suction installed steel buckets. These two steel buckets, with a space of 1.0 m, were connected by welding steel plate. The external diameter of the reinforced concrete cylinder and the steel bucket is identical, i.e. 10.5 m.

Because of the presence of soft clays, excess pore pressures will develop during construction and its value will be associated with the construction rate and procedures. The excess pore water pressure will result in reduction of the shear strength of soil, thus significantly affect the occurrence of shear failure in foundation soils. Prefabricated drains were used to improve the soils as shown in Fig. (1). The cofferdam during construction is likely to be the most critical situation as far as excess pore pressure and its effect on the stability of the structures is concerned.

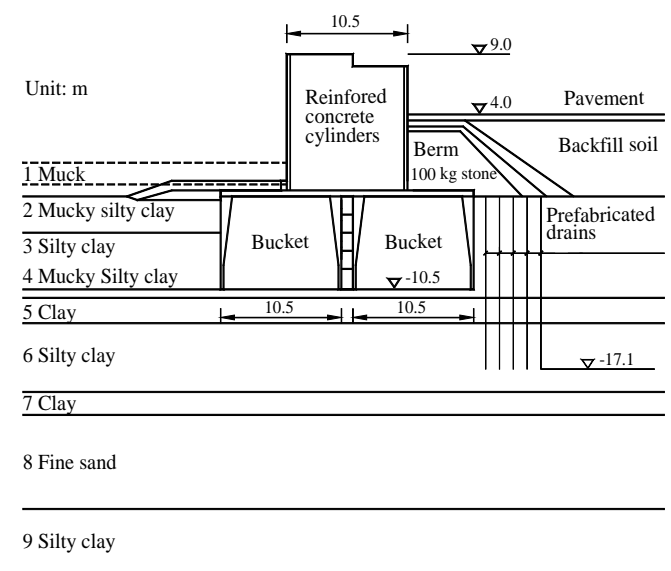


Fig. (1). Configurations of cofferdam.

*Address correspondence to this author at the State Key Laboratory of Hydrosience and Engineering, Tsinghua University Beijing, 100084, China; Tel: 861062792984; E-mail: cezhangjh@mail.tsinghua.edu.cn

This paper presents a finite element study of the cofferdam of Zhuanghai artificial island. The purpose of the study is to evaluate the stability of the soil-structure system in terms of the consolidation process and the associated shear strength transformation. The critical situations of the cofferdam will be indicated.

GEOTECHNICAL PARAMETERS OF SOILS

The foundation at Zhuanghai artificial island is mainly composed of five soils, i.e. muck, mucky silty clay, silty clay, clay and fine sand. The muck has been excavated before construction. Nine soil layers, numbered as 1~ 9 from up down, are shown in Fig. (1) and Table 1. Standard penetration test, vane shear test and laboratory tests have been performed by Tianjin University to derive geotechnical parameters of foundation soils. The measured parameters are summarized in Table 1.

Since the clays are normal consolidated, so the lateral pressure coefficient K is expressed as

$$K = 1 - \sin \phi' \quad (1)$$

where ϕ' is the effective internal friction angle of soil. The Poisson ratio ν can be written

$$\nu = \frac{K}{1 + K} \quad (2)$$

and the Yang's Modulus E is derived to be

$$E = E_s \left(1 - \frac{2\nu^2}{1 - \nu} \right) \quad (3)$$

where E_s is the oedometric modulus. The Yang's modulus and Poisson ratio of soil will later be used in finite element analysis are listed in Table 2.

Table 1. Property Parameters of Foundation Soils

No.	Soil	Depth (m)	Effective Cohesion (kPa)	Effective Internal Friction Angel (deg.)	Oedometric Modulus (MPa)	Permeability Coefficient (m/s)
1	Muck	0.0~1.8	7.1	2.3	1.9	5.0×10^{-9}
2	Mucky silty clay	1.8~5.8	9.6	3.3	3.2	1.0×10^{-8}
3	Silty clay	5.8~10.6	13.1	6.2	3.7	5.0×10^{-8}
4	Mucky silty clay	10.6~11.2	3	24.6	9.3	2.0×10^{-9}
5	Clay	11.2~13.3	14.2	10.3	2.6	5.0×10^{-10}
6	Silty clay	13.3~19.0	17.4	10.95	5.7	5.0×10^{-9}
7	Clay	19.0~20.9	21.8	13.8	9.6	3.0×10^{-10}
8	Fine sand	20.9~28.7	6.7	30.65	18.6	2.0×10^{-6}
9	Silty clay	28.7~34.4	17.6	15.95	6.3	5.0×10^{-9}

The extended Drucker-Prager model implemented in the software ABAQUS (Version 6.7) [10] is used to describe the deformation of foundation soils. Associated flow rule is adopted, so the dilation angle is assumed to be identical to the friction angle. The suggested value of flow stress ratio is 0.8, to ensure that the yield locus on the π -plate is close to the Mohr-Coulomb yield criterion.

Table 2. Yang's Modulus and Poisson Ratio of Foundation Soils

No.	Yang's Modulus (MPa)	Poisson Ratio
1	0.11	0.490
2	0.27	0.485
3	0.58	0.471
4	5.3	0.369
5	0.67	0.451
6	1.55	0.448
7	3.28	0.432
8	12.60	0.329
9	2.44	0.420

FINITE ELEMENT MODEL

Due to the great length of the cofferdam, cofferdam-soil system can be assumed to be a plane strain problem. Fig. (2) shows the finite element mesh used in numerical analysis. Eight-node biquadratic elements are used in order to decrease the distortion of drainage rate near fabricated drain elements.

Hansbo [11] present a simple solution of vertical drains with regard to well resistance and smear effect. Hird *et al.* [12] performed an equivalent plain-strain analysis considering a unit cell of the vertical drain. Indraratna and Redana [13] developed the plane strain model to quantify the smear effect.

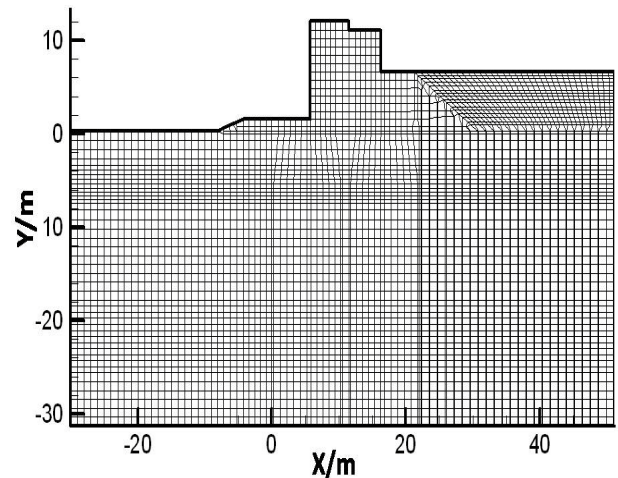


Fig. (2). Finite element mesh of cofferdam.

The vertical drain system is converted into equivalent plane strain by adjusting the spacing of the drain wall or the permeability of soil or both. Only the permeability of soil is adjusted in this study, using following formula [13]:

$$\frac{k_{hp}}{k_h} = \frac{2}{3 \left[\ln \left(\frac{R}{r_s} \right) + \left(\frac{k_n}{k_s} \right) \ln \left(\frac{r_s}{r_w} \right) - \frac{3}{4} \right]} \quad (4)$$

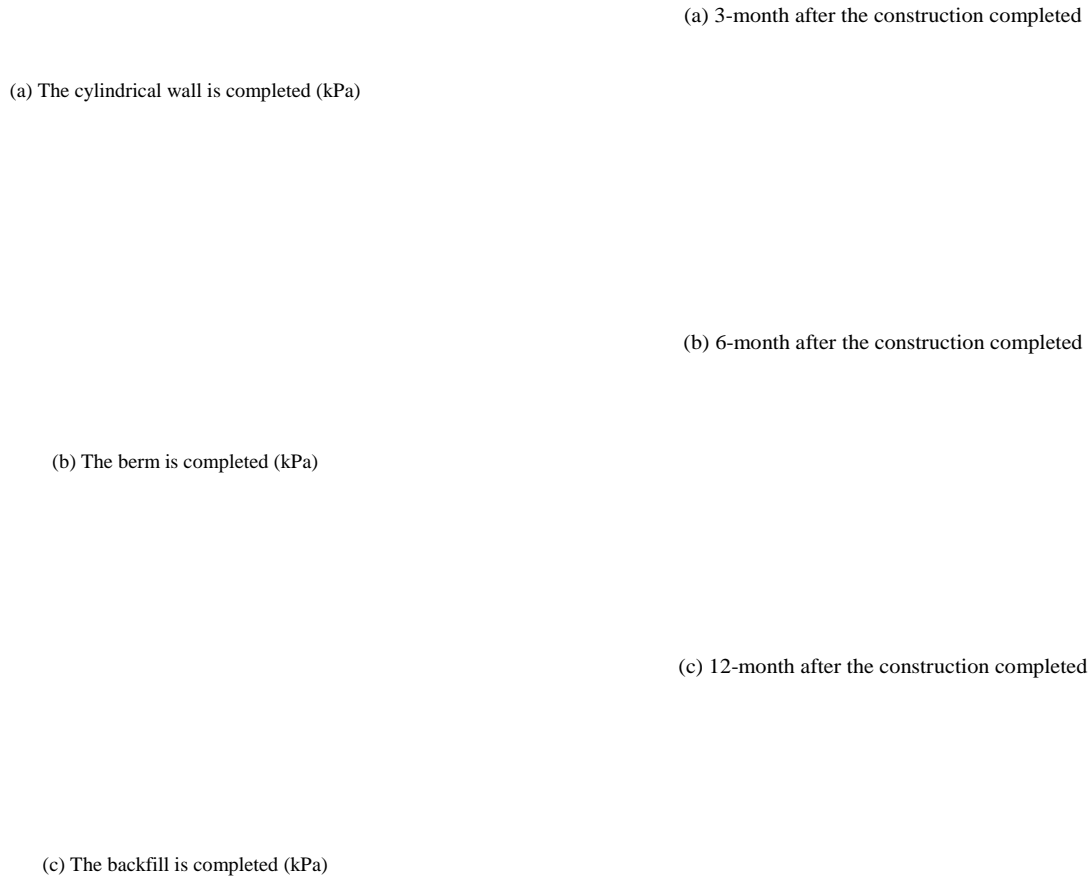


Fig. (6). Excess pore pressure in model with no drains.

both models. The vertical drains demonstrate effective in preventing high pore pressure.

The dissipation of the excess pore pressure is of particular significance regarding the long-term stability of the soil-structure system. Fig. (7) shows the dissipation process of excess pore pressure 3 - 24 months after construction, the effect of fabricated drains is also involved. As seen from Fig. (7), the excess pore pressure is quite low in the region incorporated with vertical drains, but remains almost unchanged with time beyond that region due to low permeability of the clays.

CONCLUSIONS

This paper presents a finite element simulation of a cofferdam incorporating bucket foundation in soft clays at Zhuanghai artificial island. Following conclusions can be drawn.

The maximum horizontal displacement and settlement of the reinforced concrete retaining wall is 0.15 m and 0.55 m

(a) 3-month after the construction completed

(b) 6-month after the construction completed

(c) 12-month after the construction completed

(d) 24-month after the construction completed

Fig. (7). Excess pore pressure after construction (kPa).

when the construction is just completed. The maximum horizontal displacement of the foundation soil is 0.35 m, occurring underneath the foreshore toe of the bucket. The movement of the soil indicates a lateral outward trend.

Most of the ground deformation occurs during the construction, especially the horizontal displacements of the retaining wall and foundation soils. However, the settlement of the retaining wall increases from 0.55 m at the completion of the construction up to 0.72 m when the foundation is fully consolidated.

The prefabricated drains demonstrate very effective in preventing high pore pressure and thus potential failure through the foundation soils. Beyond the region improved by vertical drains, high excess pore pressure exhibits even 2 years after the completion of the construction.

ACKNOWLEDGEMENT

The research work was funded by the National Basic Research Program of China (2007CB714102) and National Natural Science Foundation of China (50679035).

REFERENCES

- [1] X.B. Lu, S.Y. Wang, J.H. Zhang, G.L. Sun and Z.M. Shi, "Experimental study of pore pressure and deformation of suction bucket foundations under horizontal dynamic loading," *China Ocean Engineering*, vol. 19, pp. 671-680, 2005.
- [2] R. Dyvik, K.H. Andersen, C. Madshus and T. Amundsen, "Model test of platforms, I description," *Journal of Geotechnical Engineering ASCE*, vol. 115, pp. 1532-1549, 1989.
- [3] R. Dyvik, K.H. Andersen, C. Madshus and T. Amundsen, "Model test of platforms, II interpretation," *Journal of Geotechnical Engineering ASCE*, vol. 115, pp. 1550-1568, 1989.
- [4] M.A. Allard, K.H. Andersen and J. Hermstad, "Centrifuge model tests of a gravity platform on very dense sand: I: testing technique and results," In: *International Conference on the Behavior of Offshore Structures*, Oxford, UK, 1995, pp. 231-254.
- [5] S. El-Gharbawy and R. Solson, "The cyclic pullout capacity of suction caisson foundations," In: *Proceeding 9th Offshore and Polar Engineering Conference*, Brest, France, 1999, pp. 660-667.
- [6] J.H. Zhang, L.M. Zhang and X.B. Lu, "Centrifuge modeling of suction bucket foundations for platforms under ice-sheet-induced cyclic lateral loadings," *Ocean Engineering*, vol. 34, pp. 1069-1079, 2007.
- [7] K. Wu, M.T. Luan, Q.L. Fan and Z.Y. Wang, "Numerical analysis of bearing capacity of suction bucket foundation under combined loads", In: *the Ninth International Conference on Engineering Structural Integrity Assessment*, Beijing, China, 2007, pp. 594-596.
- [8] J.M. Zhang, J.H. Zhang, G. Wang and Y. Chen, "Stability of jetties for channel protection in soft soils at huanghua port," *Ocean Engineering*, vol. 35, pp. 1716-1726, 2008.
- [9] J.M. Zhang, J.H. Zhang, G. Wang and Y. Chen, "Safety evaluation of breakwaters based on physical and numerical modeling", *Ocean Engineering*, vol. 36, pp. 852-862, 2009.
- [10] ABAQUS Inc., ABAQUS/Standard User's Manual, Version 6.7. 2007.
- [11] S. Hansbo, "Consolidation of fine-grained soils by prefabricated drain," In: *Proceedings of 10th International Conference of Soil Mechanics and Foundation Engineering*, Stockholm, Sweden, 1981, pp. 677-682.
- [12] C.C. Hird, I.C. Pyrah and D. Russell, "Finite element modeling of wick drains beneath the embankments on soft ground," *Geotechnique*, vol. 42, No. 3, pp. 499-511, 1992.
- [13] B. Indraratna, and I.W. Redana, "Plane-strain modeling of smear effects associated with vertical drains," *Journal of Geotechnical and Geoenvironmental Engineering*, vol. 123, No. 5, pp. 474-478, 1997.

Received: July 15, 2009

Revised: August 14, 2009

Accepted: August 17, 2009

© Zhang and Zhang; Licensee *Bentham Open*.

This is an open access article licensed under the terms of the Creative Commons Attribution Non-Commercial License (<http://creativecommons.org/licenses/by-nc/3.0/>) which permits unrestricted, non-commercial use, distribution and reproduction in any medium, provided the work is properly cited.